



CCT & Power are selectable.



Feature:

The new Lite-way Architectural fixture adopts the latest in optical and LED technology for use in many commercial applications. The fixture provides a single pleasant volumetric soft light that fills any interior space, giving it a large, brighter, and more productive ambiance.

Mounting:

- Surface Mounting
- Recessed lighting fixture


Applications:

- Office
- Hallways
- Multipurpose Rooms
- Conference Rooms

Ratings:

- UL1598 suitable for damp locations, Type IC
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at(-20°C to +50°C)(-4°F to 122°F)
- The 0-10V Dimming types is continuous
- The product can dim to 10%
- Beam Angle:120°, CRI: 80, Life:50000H.

Dimension:(mm/Inch)

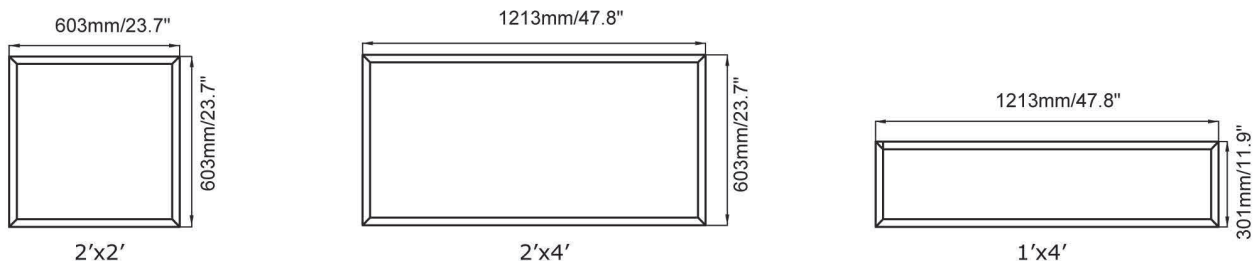

Item No.	Description	Power(W)	Volt(V)	Efficacy@4000K (LM/W)	CCT(K)	Size(Inch)
L05637	2'X2'	40-30-25	120-277	110	3500-4000-5000	L23.7"*W23.7"*H1.42"
L05638	2'X4'	50-40-30	120-277	110	3500-4000-5000	L47.8"*W23.7"*H1.42"
L05639	1'X4'	40-30-25	120-277	110	3500-4000-5000	L47.8"*W11.9"*H1.42"



CCT & Power are selectable.



Product Features

LED Troffer provides a single pleasant volumetric soft light that fills any interior space, giving it a larger, brighter, and more productive ambience.

Mounting

Surface Mounting, Recessed lighting fixture.


Applications

Offices, Hallways, Multipurpose Rooms, Conference Rooms.

Ratings:

- UL1598 suitable for damp locations, Type IC
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at(-20°C to +50°C)(-4°F to 122°F)
- The 0-10V Dimming types is continuous
- The product can dim to 10%
- Beam Angle:120°, CRI: 80, Life:50000H.

Dimension(mm/Inch):

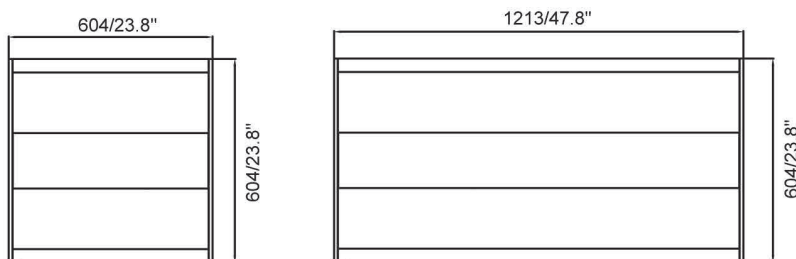

Depth: 54mm(2.13")

Weight(kg): 3.10(2'*2')

5.19(2'*4')

Item No.	Description	Power(W)	Volt(V)	Efficacy@4000k (LM/W)	3CCT(K)	CRI	Life(H)
LW01257	2'*2'	30-35-40	120-277	125	3500-4000-5000	80	50000
LW01258	2'*4'	34-38-45	120-277	125	3500-4000-5000	80	50000



3CCT selectable.

Features:

1. CRI80; Life: 50000H.
2. 3CCT(3500-4000-5000K) changeable by dip-switch.
3. Higher brightness, lower energy.
4. Light is soft and uniform, safe to eyes.
5. Instant start, NO flickering, NO humming.
6. Green and eco-friendly without mercury.

Applications:


Widely used in offices, markets, exhibition halls, workbench areas, storage areas, living rooms, workshops and etc.



Item No.	Description	Power(W)	Volt(V)	Lumen(LM)	Direction of the Light	Size(inch)
LW00362	4FT	40	120-347	5200	Downward	L47.48*W2.75*H3.15"



CCT & Power are selectable.

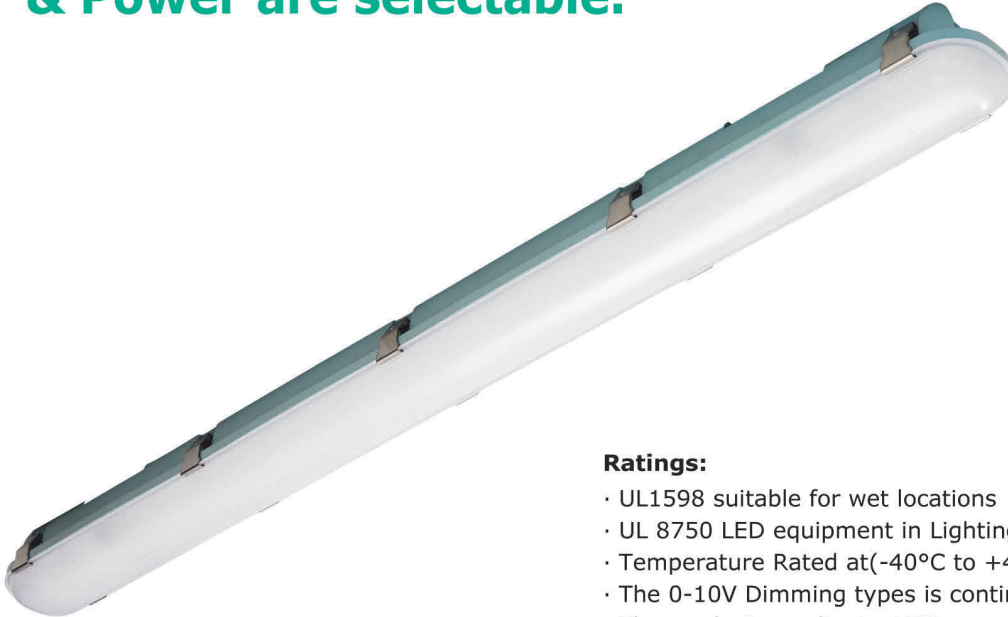

Ratings:

- UL1598 suitable for wet locations
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at(-40°C to +40°C)(-40°F to 104°F)
- The 0-10V Dimming types is continuous
- The product can dim to 10%

Features:

1. LED VAPOR series are designed to save energy and meet low light egress requirements. Also the fixture is optimal for parking driver lane compliance. For uses as utility lighting, parking garage and stairwell lighting where meets applicable building and safety codes.
2. Life:50000H.

Mounting:


V-Hook ready, Surface Mounting

Applications:

Offices, Hallways, Multipurpose Rooms, Conference Rooms.

Dimension(mm/Inch):


Length:1200mm(47.24")
Width: 90mm(3.54")
Depth:80mm(3.15")
Weight:2.00(kgs)

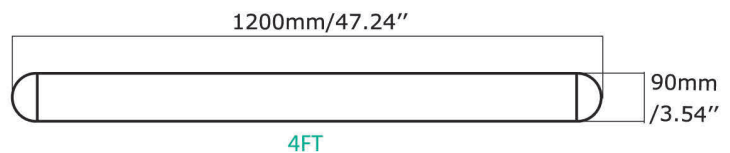

Item No.	Description	Power(W)	Volt(V)	Efficacy@4000k (LM/W)	3CCT(K)	CRI
LW00436	4FT Vapor Tight	34-38-45	120-277	130	3500-4000-5000	80



CCT & Power are selectable.

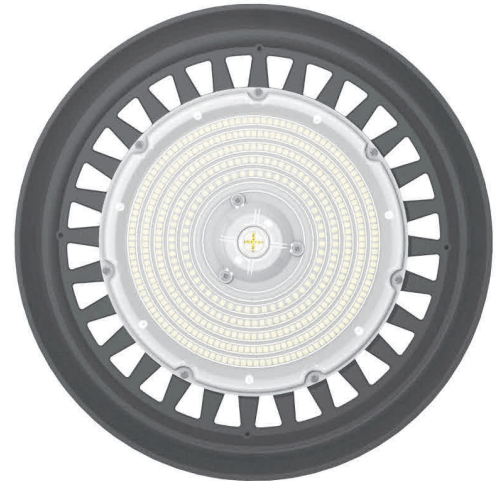


Application:

Warehouse, factory and workshops;
Highway toll station and gas station;
Exhibition hall; Gymnasium and
supermarkets, etc.


Features:

1. Beam Angle: 90°.
2. Light is soft and uniform, safe to eyes.
3. Instant start, NO flickering, NO humming.
4. Green and eco-friendly without mercury.

Dimension(Inch):




LW01264/LW01265



LW01266

Item No.	Power(W)	Volt(V)	Lumen(LM)	CCT(K)	CRI	Life(H)
LW01264	100	120-277	13800	5000	80	50000
LW01265	150	120-277	20500	5000	80	50000
LW01266	200	120-277	27500	5000	80	50000




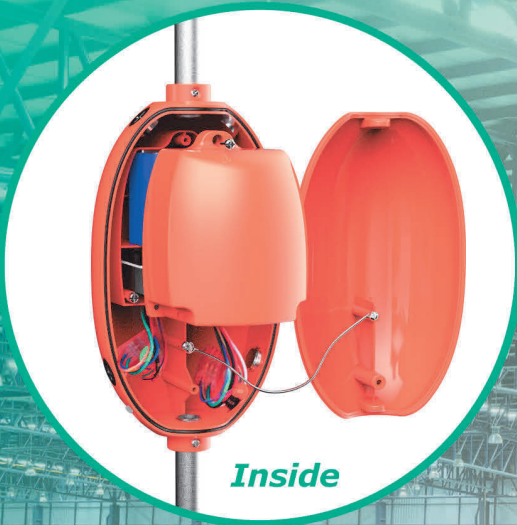


Features:

1. Simple wiring: directly connect to AC INPUT of UFO LED driver.
2. Constant power output 40W.
3. High output voltage DC170V.
4. Protection: over-voltage, short-circuit, over-load, open-circuit.
5. Optimized design for UFO LED Highbay $\leq 300W$.
6. Built-in junction box.



Dimension(mm/Inch):



remote control

Item No.	Power(W)	Input Volt(V)	Output Volt(V)	Emergency Time(min)
LW00912	40	100-347	170V DC	90



CCT is selectable.




Features

1. Easy to install and operate.
2. Energy saving, long lifespan.
3. Green and eco-friendly without mercury.
4. Viewing Angle: 100°.
5. Dimmable: 0-10V.
6. PF: 0.9.

Application

Entrance lighting, Pathway lighting, Wall lighting area and so on.


Dimensions(mm/Inch):

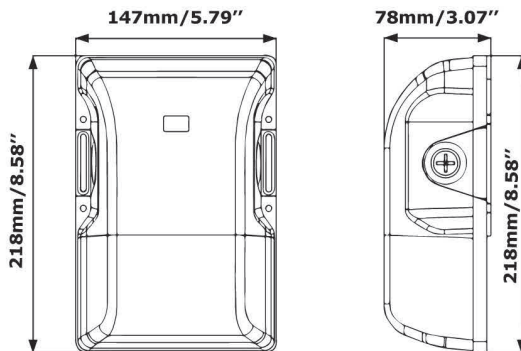

Item No.	Power(W)	Volt(V)	Lumen(LM)	3CCT(K)	CRI	Life(H)
LW00449	15	120-277	2100	3000-4000-5000	80	50000
LW00451	30	120-277	4200	3000-4000-5000	80	50000



Dimension(mm/Inch):

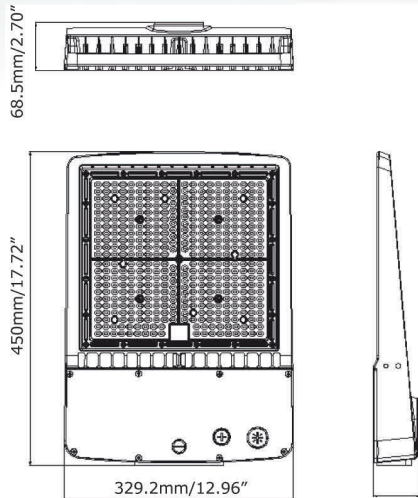

Features:

1. No UV or IR in the beam.
2. Easy to install and operate.
3. Energy saving, long lifespan.
4. Light is soft and uniform, safe to eyes.
5. Instant start, NO flickering, NO humming.
6. Green and eco-friendly without mercury.



Applications:


Stadiums, Sport courts, Parking lots, Bridge,
Building exterior wall, Squares, Street and etc.

Item No.	Power(W)	Volt(V)	Lumen(LM)	CCT(K)	CRI	Beam angle	Life(H)
LW01657	300	120-277	41000	5000	80	Type IV	50000


Features:

1. Injection-molded thermoplastic ABS housing, UL94V-0 flame rating.
2. Innovative, easy installation in minutes.
3. Suitable for wall mount applications.
4. Universal J-box mounting pattern.
5. 120V/277VAC Dual voltage operation.
6. 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
7. Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
8. Maximum 24 hours for full recharge time.
9. Test switch and charge indicator.
10. UL and CUL us listed.
11. 0° to 40°C indoor damp location listed.

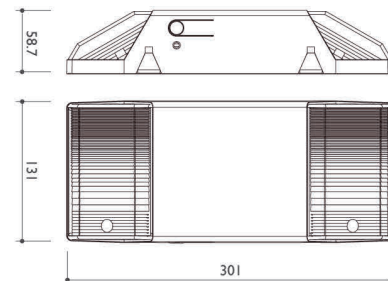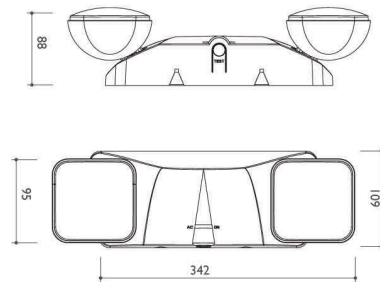




01 LED
Back-lit Panel



02 LED
Troffer




03 LED
Linear Light



04 LED Vapor



05 LED UFO
Highbay Light



06 Emergency
LED Driver



07 LED
Wall Mount



08 LED
Flood Light



09 LED Emergency
Light